

# DIESEL GENERATOR SET



## DE33E0

Image shown may not reflect actual package

<b>Output Ratings</b>		
<b>Generator Set Model - 3 Phase</b>	<b>Prime*</b>	<b>Standby*</b>
400/230 V, 50 Hz	30.0 kVA 24.0 kW	33.0 kVA 26.4 kW
480V, 60 Hz	33.8 kVA 27.0 kW	37.5 kVA 30.0 kW

\* Refer to ratings definitions on page 4.  
Ratings at 0.8 power factor.

<b>Technical Data</b>		
<b>Engine Make &amp; Model:</b>	Cat® C3.3	
<b>Generator Model:</b>	LC1514F	
<b>Control Panel:</b>	EMCP 4.1	
<b>Base Frame Type:</b>	Heavy Duty Fabricated Steel	
<b>Circuit Breaker Type:</b>	3 Pole MCB / 3 Pole MCCB	
<b>Frequency:</b>	<b>50 Hz</b>	<b>60 Hz</b>
<b>Engine Speed: RPM</b>	1500	1800
<b>Fuel Tank Capacity: litres (US gal)</b>	161 (42.5)	
<b>Fuel Consumption, Prime: l/hr (US gal/hr)</b>	7.0 (1.8)	8.1 (2.1)
<b>Fuel Consumption, Standby : l/hr (US gal/hr)</b>	7.7 (2.0)	9.0 (2.4)



# DIESEL GENERATOR SET



## Generator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V 230/115V 200/115V	380/220V 220/110V	220/127V	480/277V 240/139V	380/220V 220/110V	240/120V 208/120V		440/254V 220/127V
Motor Starting Capability* kVA	72	68	63	78	78	55	63	-	69
Short Circuit Capacity %	-	-	-	-	-	-	-	-	-
Reactances: Per Unit									
Xd	2.298	2.474	2.741	2.045	2.323	3.706	3.092	-	2.764
X'd	0.143	0.153	0.170	0.127	0.144	0.230	0.192	-	0.171
X''d	0.071	0.077	0.085	0.063	0.072	0.115	0.096	-	0.086

Reactances shown are applicable to prime ratings.  
\*Based on 30% voltage dip at 0.6 power factor.

## Generator Technical Data

Physical Data	
LC Series	
Model:	LC1514F
No. of Bearings:	1
Insulation Class:	H
Winding Pitch - Code:	2/3 - 6
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R220

Operating Data	
Overspeed: RPM	2250
Voltage Regulation: (steady state)	+/- 1.0%
Wave Form NEMA = TIF:	50
Wave Form IEC = THF:	2.0%
Total Harmonic Content LL/LN:	5.0%
Radio Interference:	Suppression is in line with European Standard EN61000-6
Radiant Heat: kW (Btu/min)	
-50 Hz:	3.3 (188)
-60 Hz:	3.7 (210)

# DIESEL GENERATOR SET



## Technical Data



Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	30.0	24.0	33.0	26.4
400/230V	30.0	24.0	33.0	26.4
380/220V	30.0	24.0	33.0	26.4
230/115V	30.0	24.0	33.0	26.4
220/127V	30.0	24.0	33.0	26.4
220/110V	30.0	24.0	33.0	26.4
200/115V	30.0	24.0	33.0	26.4

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW
480/277V	33.8	27.0	37.5	30.0
220/127V	33.8	27.0	37.5	30.0
380/220V	33.8	27.0	37.5	30.0
240/120V	33.8	27.0	37.5	30.0
440/254V	33.8	27.0	37.5	30.0
220/110V	33.8	27.0	37.5	30.0
208/120V	33.8	27.0	37.5	30.0
240/139V	33.8	27.0	37.5	30.0

## Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	827 (1823)
Wet (+ lube oil & coolant)	840 (1852)
Fuel, lube oil & coolant	976 (2153)

Dimensions: mm (in)	
Length	1540 (60.6)
Width	970 (38.2)
Height	1361 (53.6)

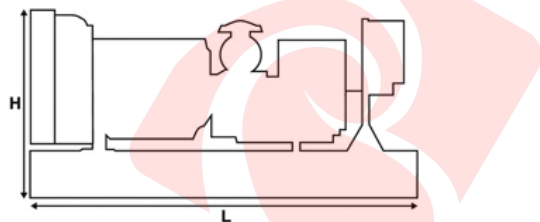

**Note:** General configuration not to be used for installation. See general dimension drawings for detail.

## Definitions

### Standby Rating

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

### Prime Rating

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

### Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

## General Data

### Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

### Quality Standards

The equipment meets the following standards: IEC60034-1, IEC60034-22, ISO3046, ISO8528, NEMA MG 1-32, NEMA MG 1-33, 2004/108/EC, 2006/42/EC, 2006/95/EC.