

# DIESEL GENERATOR SET



## DE65E3

EU stage IIIA emissions compliant.  
Suitable for Mobile Applications in the European Community.

Image shown may not reflect actual package

Output Ratings		
Generator Set Model - 3 Phase	Prime*	Standby*
400/230 V, 50 Hz	60.0 kVA 48.0 kW	65.0 kVA 52.0 kW
	-	-

\* Refer to ratings definitions on page 4.  
Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Cat® C4.4	
Generator Model:	LC1514P	
Control Panel:	EMCP 4.1	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	-
Fuel Tank Capacity: litres (US gal)	219 (57.9)	
Fuel Consumption, Prime: l/hr (US gal/hr)	16.3 (4.3)	-
Fuel Consumption, Standby : l/hr (US gal/hr)	17.5 (4.6)	-



# DIESEL GENERATOR SET

## Engine Technical Data

Physical Data		50 Hz		60 Hz	
<b>Manufacturer:</b>	Caterpillar				
<b>Model:</b>	C4.4				
<b>No. of Cylinders/Alignment:</b>	4 / In Line				
<b>Cycle:</b>	4 Stroke				
<b>Induction:</b>	Turbocharged				
<b>Cooling Method:</b>	Water				
<b>Governing Type:</b>	Mechanical				
<b>Governing Class:</b>	ISO 8528 G2				
<b>Compression Ratio:</b>	18.23:1				
<b>Displacement: l (cu.in)</b>	4.4 (268.5)				
<b>Bore/Stroke: mm (in)</b>	105.0 (4.1)/127.0 (5.0)				
<b>Moment of Inertia: kg m<sup>2</sup> (lb. in<sup>2</sup>)</b>	1.14 (3896)				
<b>Engine Electrical System:</b>					
-Voltage/Ground:	12/Negative				
-Battery Charger Amps:	65				
<b>Weight: kg (lb) - Dry:</b>	401 (884)				
- Wet:	408 (899)				

Air System		50 Hz		60 Hz	
<b>Air Filter Type:</b>	Replaceable Element				
<b>Combustion Air Flow:</b>					
m <sup>3</sup> /min (cfm)	-Standby:	4.8 (170)	-		
	-Prime:	4.7 (166)	-		
<b>Max. Combustion Air Intake</b>					
<b>Restriction: kPa (in H<sub>2</sub>O)</b>		8.0 (32.1)	-		
<b>Radiator Cooling Air Flow:</b>					
m <sup>3</sup> /min (cfm)		84.0 (2966)	-		
<b>External Restriction to</b>					
<b>Cooling Air Flow: Pa (in H<sub>2</sub>O)</b>		125 (0.5)	-		

Cooling System		50 Hz		60 Hz	
<b>Cooling System Capacity:</b>					
l (US gal)		12.6 (3.3)	-		
<b>Water Pump Type:</b>	Centrifugal				
<b>Heat Rejected to Water &amp; Lube Oil: kW (Btu/min)</b>					
	-Standby:	58.3 (3315)	-		
	-Prime:	48.6 (2764)	-		
<b>Heat Radiation to Room:</b> Heat radiated from engine and alternator					
kW (Btu/min)	-Standby:	16.2 (921)	-		
	-Prime:	14.3 (813)	-		
<b>Radiator Fan Load: kW (hp)</b>		1.0 (1.3)	-		

Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Cat dealer for power ratings at specific site conditions.

Lubrication System		50 Hz		60 Hz	
<b>Oil Filter Type:</b>	Spin-On, Full Flow				
<b>Total Oil Capacity l (US gal):</b>	8.0 (2.1)				
<b>Oil Pan l (US gal):</b>	7.0 (1.8)				
<b>Oil Type:</b>	API CH4 15W-40				
<b>Cooling Method:</b>	Water				

Performance		50 Hz		60 Hz	
<b>Engine Speed: RPM</b>		1500	-		
<b>Gross Engine Power: kW (hp)</b>					
	-Standby:	61.6 (83.0)	-		
	-Prime:	56.6 (76.0)	-		
<b>BMEP: kPa (psi)</b>					
	-Standby:	1120.0 (162.5)	-		
	-Prime:	1029.0 (149.3)	-		
<b>Regenerative Power: kW</b>		N/A	-		

Fuel System		50 Hz		60 Hz	
<b>Fuel Filter Type:</b>	Replaceable Element				
<b>Recommended Fuel:</b>	Class A2 Diesel or BSEN590				
<b>Fuel Consumption: l/hr (US gal/hr)</b>					
		<b>110% Load</b>	<b>100% Load</b>	<b>75% Load</b>	<b>50% Load</b>
<b>Prime</b>					
50 Hz	17.5 (4.6)	16.3 (4.3)	12.3 (3.2)	7.8 (2.1)	
60 Hz	-	-	-	-	
<b>Standby</b>					
50 Hz	17.5 (4.6)	13.4 (3.5)	8.6 (2.3)		
60 Hz	-	-	-		

(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)

Exhaust System		50 Hz		60 Hz	
<b>Silencer Type:</b>	Industrial				
<b>Silencer Model &amp; Quantity:</b>	EXSY1 (1)				
<b>Pressure Drop Across</b>					
<b>Silencer System: kPa (in Hg)</b>		3.30 (0.974)	-		
<b>Silencer Noise Reduction</b>					
<b>Level: dB</b>		19	-		
<b>Max. Allowable Back</b>					
<b>Pressure: kPa (in. Hg)</b>		12.0 (3.5)	-		
<b>Exhaust Gas Flow:</b>					
m <sup>3</sup> /min (cfm)	-Standby:	12.3 (435)	-		
	-Prime:	11.2 (396)	-		
<b>Exhaust Gas Temperature: °C (°F)</b>					
	-Standby:	627 (1161)	-		
	-Prime:	570 (1058)	-		

# DIESEL GENERATOR SET



## Generator Performance Data

Data Item	50 Hz			60 Hz					
	415/240V	400/230V	380/220V						
Motor Starting Capability* kVA	145	138	128	-	-	-	-	-	-
Short Circuit Capacity** %	300	300	300	-	-	-	-	-	-
Reactances: Per Unit									
Xd	2.648	2.850	3.158	-	-	-	-	-	-
X'd	0.136	0.146	0.162	-	-	-	-	-	-
X''d	0.068	0.073	0.081	-	-	-	-	-	-

Reactances shown are applicable to prime ratings.

\*Based on 30% voltage dip at 0.6 power factor and SHUNT excitation system.

\*\* With optional Permanent Magnet generator

## Generator Technical Data

Physical Data	
LC Series	
Model:	LC1514P
No. of Bearings:	1
Insulation Class:	H
Winding Pitch - Code:	2/3 - 6
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R220

Operating Data	
Overspeed: RPM	2250
Voltage Regulation: (steady state)	+/- 1.0%
Wave Form NEMA = TIF:	50
Wave Form IEC = THF:	2.0%
Total Harmonic Content LL/LN:	2.0%
Radio Interference:	Suppression is in line with European Standard EN61000-6
Radiant Heat: kW (Btu/min)	
-50 Hz:	5.7 (324)
-60 Hz:	-

# DIESEL GENERATOR SET



## Technical Data


Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	60.0	48.0	65.0	52.0
400/230V	60.0	48.0	65.0	52.0
380/220V	60.0	48.0	65.0	52.0

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW

## Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	914 (2015)
Wet (+ lube oil & coolant)	927 (2044)
Fuel, lube oil & coolant	1112 (2453)

Dimensions: mm (in)	
Length	1925 (75.8)
Width	1120 (44.1)
Height	1361 (53.6)

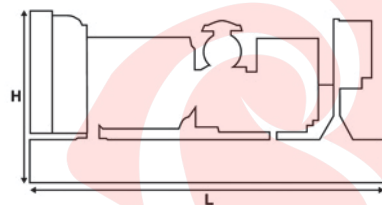

**Note:** General configuration not to be used for installation. See general dimension drawings for detail.

## Definitions

### Standby Rating

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

### Prime Rating

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

### Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

## General Data

### Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

### Quality Standards

The equipment meets the following standards: IEC60034-1, IEC60034-22, ISO3046, ISO8528, NEMA MG 1-32, NEMA MG 1-33, 2004/108/EC, 2006/42/EC, 2006/95/EC.