

# DIESEL GENERATOR SET



## DE90E3S

EU stage IIIA emissions compliant.  
Suitable for Mobile Applications in the European Community.

Image shown may not reflect actual package

Output Ratings		
Generator Set Model - 1 Phase	Prime*	Standby*
230V, 50Hz	82.0 kVA 82.0 kW	90.0 kVA 90.0 kW
	-	-

\* Refer to ratings definitions on page 4.  
Ratings at 1.0 power factor.

Technical Data		
Engine Make & Model:	Cat® C4.4	
Generator Model:	LCB3114H	
Control Panel:	EMCP 4.1	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	-
Fuel Tank Capacity: litres (US gal)	250 (66.0)	
Fuel Consumption, Prime: l/hr (US gal/hr)	24.2 (6.4)	-
Fuel Consumption, Standby : l/hr (US gal/hr)	25.7 (6.8)	-

# DIESEL GENERATOR SET



## Engine Technical Data

Physical Data		Lubrication System	
<b>Manufacturer:</b>	Caterpillar	<b>Oil Filter Type:</b>	Spin-On, Full Flow
<b>Model:</b>	C4.4	<b>Total Oil Capacity I (US gal):</b>	8.0 (2.1)
<b>No. of Cylinders/Alignment:</b>	4 / In Line	<b>Oil Pan I (US gal):</b>	7.0 (1.8)
<b>Cycle:</b>	4 Stroke	<b>Oil Type:</b>	API CC/SE 15W-40
<b>Induction:</b>	Turbocharged Air To Air Charge Cooled	<b>Cooling Method:</b>	Water
<b>Cooling Method:</b>	Water	<b>Performance</b>	
<b>Governing Type:</b>	Electronic	<b>50 Hz</b>	<b>60 Hz</b>
<b>Governing Class:</b>	ISO 8528 G2	<b>Engine Speed: RPM</b>	1500 -
<b>Compression Ratio:</b>	16.2:1	<b>Gross Engine Power: kW (hp)</b>	
<b>Displacement: I (cu.in)</b>	4.4 (268.5)	-Standby:	105.0 (141.0) -
<b>Bore/Stroke: mm (in)</b>	105.0 (4.1)/127.0 (5.0)	-Prime:	95.5 (128.0) -
<b>Moment of Inertia: kg m<sup>2</sup> (lb. in<sup>2</sup>)</b>	1.31 (4476)	<b>BMEP: kPa (psi)</b>	
<b>Engine Electrical System:</b>		-Standby:	1910.0 (277.0) -
-Voltage/Ground:	12/Negative	-Prime:	1737.0 (251.9) -
-Battery Charger Amps:	65	<b>Regenerative Power: kW</b>	0.0 -
<b>Weight: kg (lb) - Dry:</b>	465 (1025)	<b>Fuel System</b>	
- Wet:	474 (1045)	<b>Fuel Filter Type:</b>	Replaceable Element
		<b>Recommended Fuel:</b>	Class A2 Diesel or BSEN590
		<b>Fuel Consumption: l/hr (US gal/hr)</b>	
		<b>110% Load</b>	<b>100% Load</b>
		<b>75% Load</b>	<b>50% Load</b>
		<b>Prime</b>	
		50 Hz	25.7 (6.8) 24.2 (6.4) 19.3 (5.1) 13.2 (3.5)
		60 Hz	- - - -
		<b>Standby</b>	
		50 Hz	25.7 (6.8) 20.8 (5.5) 14.5 (3.8)
		60 Hz	- - -
		(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)	
<b>Air System</b>	<b>50 Hz</b>	<b>60 Hz</b>	
<b>Air Filter Type:</b>	Paper Element		
<b>Combustion Air Flow:</b>			
m <sup>3</sup> /min (cfm)	-Standby: 6.6 (231)	-	
	-Prime: 6.4 (227)	-	
<b>Max. Combustion Air Intake</b>			
<b>Restriction: kPa (in H<sub>2</sub>O)</b>	8.0 (32.1)	-	
<b>Radiator Cooling Air Flow:</b>			
m <sup>3</sup> /min (cfm)	201.0 (7098)	-	
<b>External Restriction to</b>			
<b>Cooling Air Flow: Pa (in H<sub>2</sub>O)</b>	125 (0.5)	-	
<b>Cooling System</b>	<b>50 Hz</b>	<b>60 Hz</b>	
<b>Cooling System Capacity:</b>			
I (US gal)	17.0 (4.5)	-	
<b>Water Pump Type:</b>	Centrifugal		
<b>Heat Rejected to Water &amp; Lube Oil: kW (Btu/min)</b>			
-Standby:	63.1 (3588)	-	
-Prime:	57.4 (3264)	-	
<b>Heat Radiation to Room:</b> Heat radiated from engine and alternator			
kW (Btu/min)	-Standby: 26.2 (1490)	-	
	-Prime: 23.7 (1348)	-	
<b>Radiator Fan Load: kW (hp)</b>	2.8 (3.8)	-	
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Cat dealer for power ratings at specific site conditions.			
		<b>Exhaust System</b>	<b>50 Hz</b>
		<b>60 Hz</b>	
		<b>Silencer Type:</b>	Industrial
		<b>Silencer Model &amp; Quantity:</b>	EXSY1 (1)
		<b>Pressure Drop Across</b>	
		<b>Silencer System: kPa (in Hg)</b>	2.10 (0.620) -
		<b>Silencer Noise Reduction</b>	
		<b>Level: dB</b>	22 -
		<b>Max. Allowable Back</b>	
		<b>Pressure: kPa (in. Hg)</b>	15.0 (4.4) -
		<b>Exhaust Gas Flow:</b>	
		m <sup>3</sup> /min (cfm)	-Standby: 16.5 (584) -
			-Prime: 16.0 (565) -
		<b>Exhaust Gas Temperature: °C (°F)</b>	
		-Standby:	506 (943) -
		-Prime:	480 (896) -

# DIESEL GENERATOR SET



## Generator Performance Data

Data Item	50 Hz				60 Hz				
	240V	230V	220V						
Motor Starting Capability* kVA	247	233	219	-	-	-	-	-	-
Short Circuit Capacity** %	300	300	300	-	-	-	-	-	-
Reactances: Per Unit									
Xd	1.850	2.014	2.202	-	-	-	-	-	-
X'd	0.169	0.184	0.202	-	-	-	-	-	-
X''d	0.102	0.111	0.121	-	-	-	-	-	-

Reactances shown are applicable to prime ratings.

\*Based on 30% voltage dip at 0.9 power factor and SHUNT excitation system.

\*\* With optional Permanent Magnet generator.

## Generator Technical Data

Physical Data	
LC Series	
Model:	LCB3114H
No. of Bearings:	1
Insulation Class:	H
Winding Pitch - Code:	2/3 - M
Wires:	4
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R250

Operating Data	
Overspeed: RPM	2250
Voltage Regulation: (steady state)	+/- 0.5%
Wave Form NEMA = TIF:	50
Wave Form IEC = THF:	2.0%
Total Harmonic Content LL/LN:	2.5%
Radio Interference:	Suppression is in line with European Standard EN61000-6
Radiant Heat: kW (Btu/min)	
-50 Hz:	7.8 (444)
-60 Hz:	-

# DIESEL GENERATOR SET



## Technical Data


Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
240V	82.0	82.0	90.0	90.0
230V	82.0	82.0	90.0	90.0
220V	82.0	82.0	90.0	90.0

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW

## Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	1232 (2717)
Wet (+ lube oil & coolant)	1253 (2762)
Fuel, lube oil & coolant	1464 (3228)

Dimensions: mm (in)	
Length	2089 (82.2)
Width	1120 (44.1)
Height	1495 (58.9)

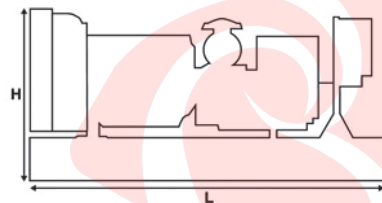

**Note:** General configuration not to be used for installation. See general dimension drawings for detail.

## Definitions

### Standby Rating

Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

### Prime Rating

Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year.

### Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

## General Data

### Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

### Quality Standards

The equipment meets the following standards: IEC60034-1, IEC60034-22, ISO3046, ISO8528, NEMA MG 1-32, NEMA MG 1-33, 2004/108/EC, 2006/42/EC, 2006/95/EC.